



# Vertical Machining Centers VECTOR 1000 M Si (SK40) + 4. axis



**SKU : 422345**

## CUSTOM MODEL

The Vector series is the compact all-in-one machining solution, designed and preconfigured for complex manufacturing challenges. The machines are designed using the latest FEM analysis software. The production takes place under strict quality control in order to guarantee perfect execution. Both the tried and tested Meehanite cast and the delta construction of the column ensure additional stability of the machine frame. The consistently high-quality components guarantee smooth operation during multiple shifts.

- Available with Siemens or Heidenhain controller
- Extra-wide Y-shaped Meehanite column for maximum stability
- 30-bar CTS to ensure optimum machining quality
- Designed for multi-shift operation

## TECHNICAL SPECS

### WORKING AREA

|  |               |
|--|---------------|
| Table dimensions                       | 43 in x 22 in |
| Table load capacity                    | 1760 lbs      |
| Spindle nose-to-table surface distance | 6 in - 28 in  |
| Spindle center - column                | 20 in         |

### TRAVELS

|               |         |
|---------------|---------|
| Travel X-axis | 39.4 in |
| Travel Y-axis | 22 in   |
| Travel Z-axis | 22 in   |
| Guideway      | Roller  |

### HEADSTOCK

|                      |               |
|----------------------|---------------|
| Spindle speed        | 10000 rpm     |
| Spindle mount        | SK 40         |
| Torque, constant     | 42 ft.lb.     |
| Spindle bearing      | 7012 x 4      |
| Spindle drive method | Riemenantrieb |

### RAPID FEED

|                       |               |
|-----------------------|---------------|
| Rapid feed X-/ Y-axis | 1417 in/min   |
| Rapid feed Z-axis     | 590.55 in/min |

### FEED

|                  |              |
|------------------|--------------|
| Work feed X-axis | 393.7 in/min |
| Work feed Y-axis | 393.7 in/min |
| Work feed Z-axis | 393.7 in/min |

### TOOL HEAD

|                              |                    |
|------------------------------|--------------------|
| Tool change type             | Doppelarm          |
| Number of tool stations      | 24 positions       |
| Tool selection               | Memory random      |
| Tool size Ø x L (max.)       | 3.15 in x 13.78 in |
| Tool weight max.             | 15 lbs             |
| Tool-change time tool/tool   | 1.8 sec            |
| Tool-changing time chip/chip | 3.9 sec            |

### ACCURACIES

|                        |                        |
|------------------------|------------------------|
| Repeatabilities        | ± 0003 / ± 0.00012" in |
| Positioning accuracies | ± 0005/ 0.0002" in     |

### DRIVE CAPACITY

|                             |          |
|-----------------------------|----------|
| Main drive, continuous load | 12.07 Hp |
| Total power consumption     | 15 kVA   |
| Voltage                     | 400 V    |
| Mains frequency             | 50 Hz    |


### CONTROL

|         |         |
|---------|---------|
| Control | Siemens |
|---------|---------|

### MEASURES AND WEIGHTS

|  |                         |
|--|-------------------------|
| Overall dimensions (length x width x height) | 104 in x 87 in x 107 in |
| Weight                                       | 10120 lbs               |

## PRODUCT DETAILS

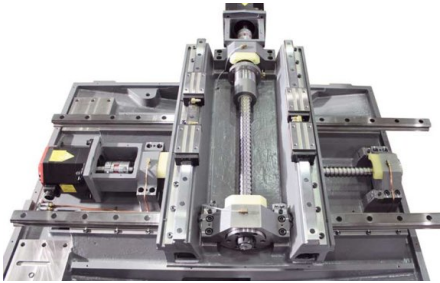

Divider type DR-170 with 8.27" setup table

### Highlights

- Rigid machine structure with extra deep center of gravity and small footprint

### Machine Design

- 30 mm preloaded ball screws combined with a digital drive package provide a rigid table guide and high torque
- A major focus during development of this machine was a space-saving design
- Dual-arm tool changer with 24 stations ensures adequate flexibility and capacity for every day production needs
- The Vector Series features linear guides on X, Y and Z to ensure high accuracy made possible by lower friction
- 435 psi internal cooling for optimum machining quality

### Spindle

- Spindle runs on multiple bearings to ensure excellent absorption and dissipation of forces during machining

### Tool Changer

- Changing times (1.8 seconds tool-to-tool and 3.9 seconds chip-to-chip) increase spindle up-time and machine output

### Control Siemens Sinumerik 828D

- The top specialist for demanding milling operations
- Compact, robust, maintenance-free control panel-based CNC
- Comfortable program and parameter input via QWERTY keyboard
- 100 adjustable zero offsets
- Synchronous actions, and quick output of help functions
- Siemens Sinumerik 828 D
- Maximum machining precision
- Intelligent kinematic transformations for machining of cylindrical parts, and for angled workpiece levels
- SINUMERIK MDynamics with the new Advanced Surface feature: for perfect part surfaces and shortest machining times in die making applications
- Siemens Sinumerik 828D CNC highlights, specifications and features
- ShopMill: shortest programming time for single parts and small batch productions
- ProgramGUIDE: fastest machining time and maximum flexibility for high-volume series productions
- Unique spectrum of technology cycles - from milling contours with residual material recognition to process measurements
- Animated elements: unique operation and programming assistance with animated sequences
- Advanced data transfer options via USB stick, CF card and network (Ethernet)
- Easy message: maximum machine availability due to process monitoring per texting (SMS)
- SINUMERIK MDynamics package with Advanced Surface for mold making applications
- Jerk-limited acceleration
- Dynamic feed-forward control
- 4-axis simultaneous interpolation (X, Y, Z and rotary axis)
- Linear, circular and helical interpolation
- Tapping without compensating chuck, plus thread cutting
- Oriented spindle hold
- Toggle between inch and metric units
- FRAME concept for individual coordinate transformations, rotations, scaling and mirroring

### Ready for Renishaw accessories installation

**Additionally equipped as standard with a 4th axis mounted dividing head type DR-170 with 210 mm clamping table, servo motor, axis amplifier and pneumatic brake.**

## CONTROLS & SOFTWARE

### Siemens 828D control with Shopmill

## SINUMERIK 828 D – The workhorse in the compact class of CNCs

### Highlights

- Compact, robust, maintenance-free control panel-based CNC
- Comfortable program and parameter input via QWERTY keyboard
- Maximum machining precision
- Intelligent kinematic transformations for machining of cylindrical parts, and for angled workpiece levels
- SINUMERIK MDynamics with the new Advanced Surface feature: for perfect part surfaces and shortest machining times in mold making applications
- ShopMill: shortest programming time for single parts and small batch productions
- ProgramGUIDE: fastest machining time and maximum flexibility for large series productions
- Unique spectrum of technology cycles - from milling contours with residual material recognition to process measurements
- Animated Elements: unique operation and programming assistance with animated sequences
- Modern data transfer options via USB stick, CF card and network (Ethernet)
- Easy Message: maximum machine availability due to process monitoring per texting (SMS)

### CNC hardware

- Control-panel based high-performance CNC Control
- Robust front control panel made of magnesium die-casting
- Integrated full-size QWERTY keyboard
- Maintenance-free design (no buffer battery required)

### CNC performance data and functions

- SINUMERIK MDynamics package with Advanced Surface for mold making applications
- Dynamic feed-forward control
- 4-axis simultaneous interpolation (X, Y, Z and rotary axis)
- Linear, circular and helical interpolation
- Tapping without compensating chuck, plus thread cutting
- Oriented spindle holder
- Toggle between inch and metric units
- FRAME concept for individual coordinate transformations, rotations, scaling and mirroring
- 100 adjustable zero offsets
- Synchronous actions and quick help function output

### CNC technology cycles

- Technology cycles for programGUIDE and ShopMill work step programming are available
- Large selection of drilling cycles
- Large selection of milling cycles for standard geometry
- Large selection of position patterns for drilling and milling operations
- High-speed settings for mold making applications
- Geometry calculator for free contour input
- Machining cycle for contour pockets / contour spigots with isolated contours

### Graphic features

- Animated Elements: input help for machining parameters with animated sequences
- Graphical online help system, similar to PC system
- Graphical CNC simulation with level display

### CNC tool management

- Display of tool and magazine data on one screen
- Tool management with plain-text tool names
- Loading/unloading feature for easy magazine assignment
- Tool management with tool life monitoring
- 10.4" TFT color monitor
- Jerk-limited acceleration

## STANDARD EQUIPMENT

Siemens 828D control with Shopmill  
Coolant flow through spindle, 30 bar with double filter  
24-station tool changer with dual-arm

Main spindle motor 12 HP  
ST 40 mount  
Spindle oil cooler  
Chain-type conveyor with chip container  
Electronic hand-wheel  
Oil skimmer  
Automatic central lubrication  
Coolant gun  
Chip flushing system  
Heat exchanger for electric control cabinet  
Telescoping axis cover  
USB port  
CF card reader  
Totally enclosed work space  
Work lamp  
3-color signal lamp  
Coolant system  
Adjustable machine feet  
Prepared for Renishaw TS 27  
DR 170 (8.3" diam.) 4th axis for Vector M Si  
Operating tools  
Operator instructions

## OPTIONAL EQUIPMENT

- Top cover for X.Mill/Vector 650-1000, SKU : 252819
- Connection for 4th axis (wiring only and axis chart), SKU : 253019
- Siemens Function: P25: 3D Simulation, SKU : 253378
- Siemens Function: P13: Residual Material Detection, SKU : 253379
- Siemens Function: P22: Simultaneous Recording, SKU : 253380
- Siemens measuring cycles, SKU : 253438
- Renishaw OTS wireless tool setter (OTS), SKU : 253598