



Horizontal Straight Cutting Bandsaws HB 400 T

SKU : 152821

The HB T series models are semi-automatic horizontal band saws for high-precision straight cuts in large workpieces made of steel, cast-iron and other metals. These machines are designed with a rigid, highly stable dual-column frame. The saw frame's stroke cylinder is integrated in the frame.

- Dual-column construction
- Hydraulic vise with micro adjustment
- Extensive standard equipment



TECHNICAL SPECS

CUTTING CAPACITIES

Cutting speed	36, 56 m/min
Cutting capacity 0° (round)	400 mm
Cutting capacity 0° (square)	400 mm
Cutting capacity 0° (flat) (length x width)	400 mm x 400 mm

DRIVE CAPACITY

Main motor rating	3/4 kW
Motor rating hydraulic pump	0.75 kW
Motor rating coolant pump	0.045 kW

MEASURES AND WEIGHTS

Blade dimensions	5000 mm x 41 mm x 1.3 mm
Overall dimensions (length x width x height)	2.7 m x 1.35 m x 2.15 m
Weight	1325 kg




PRODUCT DETAILS

- The torsion-resistant dual-column construction and rigid, heavy cast-iron frame ensure minimal vibration
- Hydraulically controlled saw frame feed
- At the end of the cutting cycle, the machine automatically shuts off and the saw blade returns to its adjustable home position
- The hydraulic vise of the HB 280T features a hand-wheel for micro adjustments
- The powerful motorized saw blade drive is belt-driven on the HB 280T and reduction gear-driven on the HB 400T
- The HB 400T features a precision-machined support table with integrated feed rollers and hydraulic saw blade tensioning
- Coolant system and material support base are part of the standard equipment



STANDARD EQUIPMENT

Bimetallic band saw blade
Support with roller
Coolant system
Work lamp
Operating tools
Operator instructions

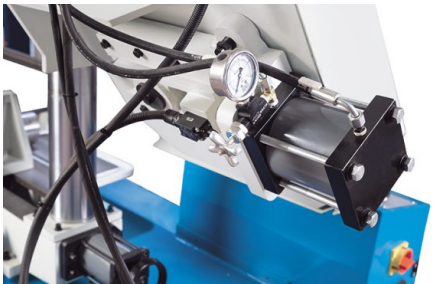

OPTIONAL EQUIPMENT

- 3 m roller table for HB 400 T, SKU : 254132
- 6 m roller table for HB 400 T, SKU : 254137

